

setting the standard in mud flaps[®]

2025+ Subaru Forester Installation Instructions Also online www.rallyarmor.com

Manufacturer warranty covers material defects on new, never installed parts. Once installed, all mud flap replaceme part costs are the responsibility of the vehicle owner. Caution against blind spots during parking.

Avoid curbs and excessive compression to the flaps. Check stock and aftermarket wheel/suspension clearances.

INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SEND FLAP RECEIPT OR PHOTO → www.rallyarmor.com/support

Recommended Tools Low-profile offset, ratcheting, flat & Phillips screwdrivers, 10mm & 11mm wrenches, pick. ONLY install on even surface using hand tools, not powered tools. AVOID OVERTIGHTENING HARDWARE.

ABOUT OUR STANDARD IN MUD FLAPS Polyurethane is a high grade plastic that may feature minor surface layer marks. These are visual variations that don't affect flap construction or performance. Most matte away as the material ages over time.

MF132 KIT CONTENTS CONFIRM ALL PARTS AND QUANTITIES BEFORE INSTALLATION			
MUD FLAP KIT P	N MF132 SEE PAGE 4 DRAWINGS	PART DESCRIPTION	QUANTITY
MF132-LF		LEFT FRONT	1
MF132-RF		RIGHT FRONT	1
MF132-LR		LEFT REAR	1
MF132-RR		RIGHT REAR	1
BRACKET KIT PN	BMF132		
BMF132-1	C.a	BRACKET FRONT	2
BMF118-RE2		BRACKET FRONT 2	2
BMF106-LR	1	BRACKET LEFT REAR	1
BMF106-RR		BRACKET RIGHT REAR	1
HARDWARE KIT	PN HMF132		
1SS	Jumme	SCREW	8
1SS#8	Jennennes-	THIN SCREW	2
15TAB		ТАВ	2
BLKNUT		NUT	2
EXPANCH	2	EXPANSION ANCHOR	2
HXBLT		BOLT	2
RACLP		CLIP	2
SMWASH	\bigcirc	WASHER	16
SSLNUT		LOCK NUT	2
UNUT2		CLIP	8

IMF132



2025+ Subaru Forester Installation Instructions Also online www.rallyarmor.com

FRONT FLAP To access interior wheel well, turn steering wheel towards installation side. **Do not fully tighten fasteners until mud flap is completely aligned to vehicle.**

Bracket/Hardware 1 Flap → 1 x BMF118-RE2; 1 x BMF132-1; 2 x 1SS; 1 x 1SS#8; 1 x BLKNUT; 1 x EXPANCH; 1 x HXBLT;


5 x SMWASH; 2 x UNUT2

IMAGE A/B Uninstall fasteners 1 - 3, then move liner aside. Install UNUT2 over mounts 1 & 2, then replace liner. **IMAGE C** Fold EXPANCH, then install into mount 3. Insert pick into center of EXPANCH to expand mount.



IMAGE D Place long leg of BMF118-RE2 over EXPANCH mount 3, short leg facing ground, then install SMWASH & 1SS#8. IMAGE E Position BMF132-1 over flap side facing tire mounts 1, 2 & 4. Install SMWASH & 1SS into mounts 1 & 2, SMWASH & HXBLT into mount 4 and SMWASH & BLKNUT onto reverse side of mount 4.

IMAGE F Ensure mud flap is parallel to even ground. Adjust preferred width before hand-tightening washers just until flush to flap.

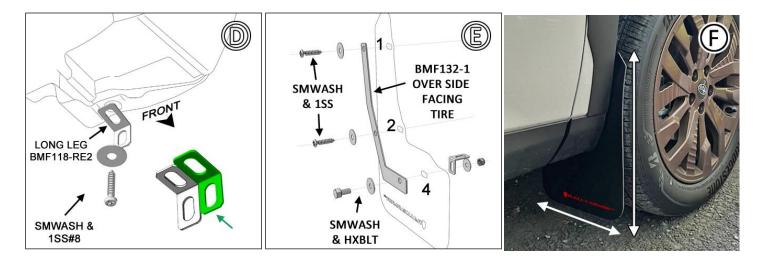

IMF132



2025+ Subaru Forester Installation Instructions Also online www.rallyarmor.com

REAR FLAP Bracket/Hardware 1 Flap → 1 x BMF106-LR/RR; 2 x 1SS; 1 x 15TAB; 1 x RACLP; 3 x SMWASH; 1 x SSLNUT;

2 x UNUT2

Do not fully tighten fasteners until mud flap is completely aligned to vehicle.

IMAGE G Uninstall fasteners 1 & 2. Temporarily remove underbody fastener 3.

IMAGE H Install UNUT2, **UNDER** mount 1 and **OVER** mount 2.

IMAGE I Place hole side of BMF106-LR/RR over mount 3, then install fastener 3.


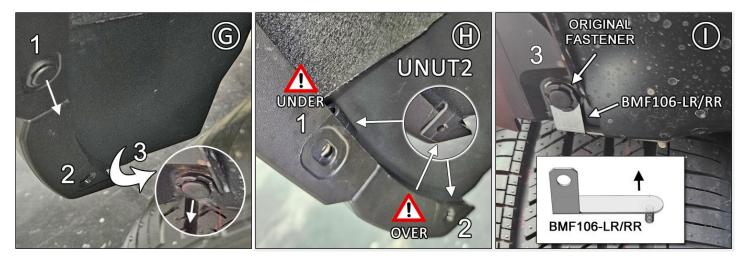


IMAGE J Place logo-side of flap facing rear bumper and against liner. Install SMWASH & 1SS into mounts 1 & 2 and SMWASH & SSLNUT into mount 3.

IMAGE K Wipe fender flare section above mount 1 clean, then adhere 15TAB onto flare. Install RACLP over flap, 15TAB & flare. **IMAGE L** Ensure mud flap is parallel to even ground. Adjust preferred width before hand-tightening washers just until flush to flap.



IMF132

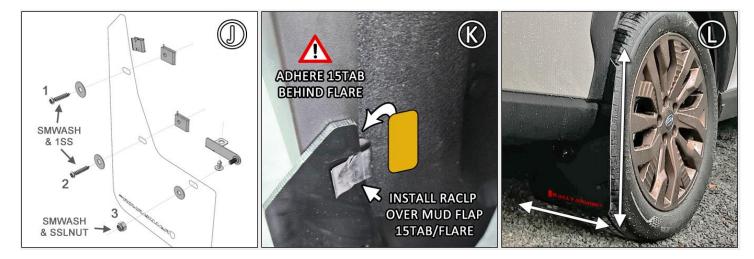

2025+ Subaru Forester Installation Instructions Also online www.rallyarmor.com

